

BILLI QUADRA

Our range of boiling, chilled and sparkling integrated water dispensers are designed and manufactured as energy efficient filtered water systems that offer customers the very best in innovation, superior performance and reliability.



Water options



Boiling



Chilled



Sparkling

Configuration



Billi water-cooled systems do not require ventilation. No cabinet cut outs needed during installation process

Compatible dispensers



Safety first

Billi's Splashfree boiling water delivery electronically varies the water flow, slowing momentarily to eliminate splashing as the water first enters the cup.

All Billi X Series dispensers are also supplied with a safety switch as standard to lock boiling water flow when needed.



Premium filtration

Billi's range of premium filters are equipped with a unique multi-layered structure which provides superior water quality.



Heat exchange

Billi's unique Heat Exchange Technology recovers the waste heat energy produced in the chilling process to preheat the boiling water. This allows boiling water to reach optimal temperature more efficiently while achieving substantial energy savings.



Adjustable chilled temperature

A simple adjustable control allows the chilled water temperature to be raised to 15°C or lowered to 6°C for perfectly chilled, refreshing drinks, with your required temperature being quickly reached and maintained.

Model	Suggested n. of people	Boiling water delivery cups per hour	Chilled water delivery cups per hour	Power supply (amps)		Height (mm)	Width (mm)	Depth (mm)
Quadra 440	up to 40	150	175	13		340	315	465
Quadra 460	up to 60	180	175	13		340	315	465
Quadra 460 Sparkling	up to 60	180	200	13	C&S	420	180	460
					Boiling	340	180	460

1 cup = 170 ml.

Installation

With a focus on space saving, Billi units are often less than half the size of comparative products. This allows for the most economical use of under-counter space.

Billi units require a minimum free cupboard space along with necessary water connections. Water must be safe to drink with a minimum dynamic pressure of 250kPa. Water-cooled and/or drip tray units require a mains waste connection.


Billi Quadra 440 and 460 models require a standard 13 amp UK power outlet. Please enquire for further install requirements.



Quadra under-counter



XL Levered dispenser

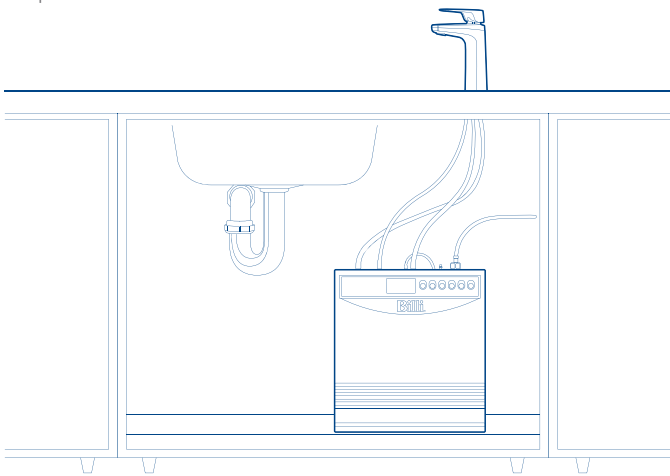

Typical installation set-up - the image is for illustrative purposes only.

Tested and certified



Quality ISO 9001



*Filters Only



WaterMark



*Filters Only

Waterlogic International Limited and WLI Trading Limited reserve the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo, Firewall and the Firewall logo are trademarks in countries where the Group operates. WLI Trading Ltd licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.



Call us today

Waterlogic UK
+44 (0) 333 600 1845
enquiries@waterlogic.co.uk

www.waterlogic.co.uk

Waterlogic IRE
1800 266 537
info@waterlogic.ie

www.waterlogic.ie