

BILLI SAHARA

Our range of boiling and ambient integrated water dispensers are designed and manufactured as energy efficient filtered water systems that offer customers the very best in innovation, superior performance and reliability.



Water options



Boiling



Ambient

Configuration



Billi Sahara under-counter units have one of the smallest installation footprints, making the most of your space.



This system does not require ventilation. No cabinet cut outs needed during installation process.

Compatible dispensers





Safety first

Billi's Splashfree boiling water delivery electronically varies the water flow, slowing momentarily to eliminate splashing as the water first enters the cup.

All Billi X Series dispensers are also supplied with a safety switch as standard to lock boiling water flow when needed.



Premium filtration

Billi's range of premium filters are equipped with a unique multi-layered structure which provides superior water quality.

The Billi Sahara range is compatible with all Billi filters.



Eco-Intelligence technology

Billi Sahara incorporates Eco-Intelligence technology which is a self-learning timer allowing the unit to only operate when required. The timer monitors daily usage patterns and even recognises evening and weekend changes in routine to effectively minimise energy consumption.

	Model	Suggested n. of people	Boiling water delivery cups per hour	Ambient water delivery cups per hour	Height (mm)	Width (mm)	Depth (mm)
	Sahara 310	up to 10	90	unlimited	340	180	360
ı	Sahara 320	up to 20	110	unlimited	340	180	460
ı	Sahara 360	up to 60	180	unlimited	340	180	460
ı	Sahara 3120	up to 120	250	unlimited	340	180	460

¹ cup = 170 ml.

Unlimited filtered still water

Billi Sahara offers an unlimited supply of filtered still water.

Billi units require a minimum free cupboard space along with necessary water connections. Water must be safe to drink with a minimum dynamic pressure of 250kPa. Water-cooled and/or drip tray units require a mains waste connection.


Billi Sahara models require a standard 13 amp UK power outlet. Please enquire for further install requirements.





Sahara under-counter

XL Levered dispenser

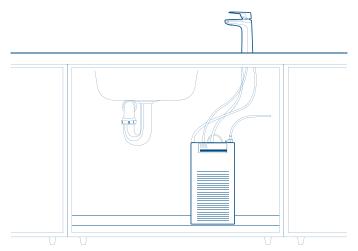

Typical installation set-up - the image is for illustrative purposes only.

Tested and certified









Waterlogic International Limited and WLI Trading Limited reserve the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo, Firewall and the Firewall logo are trademarks in countries where the Group operates. WLI Trading Ltd licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.



Call us today

Waterlogic UK

+44 (0) 333 600 1845 enquiries@waterlogic.co.uk

www.waterlogic.co.uk

Waterlogic IRE

1800 266 537 info@waterlogic.ie

www.waterlogic.ie